

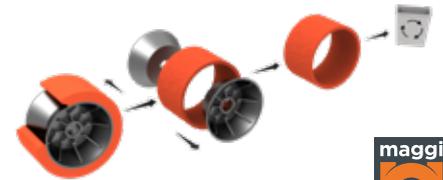


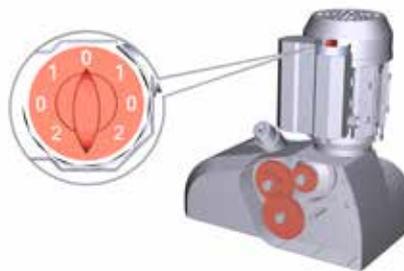

*Semi-professional  
power-feeding  
unit with fixed  
speeds*

## STEFF 2033

Safety device for a safe and effective workpiece feeding on different types of traditional wood-working machines

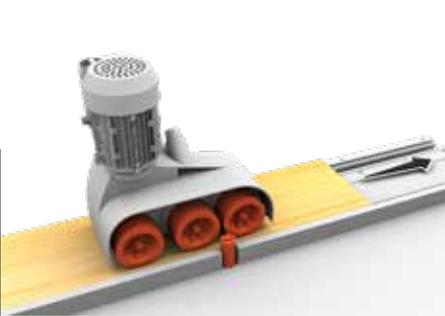

### HIGH-QUALITY END PRODUCTS

3-wheel model : the ideal solution for the feeding of laths and medium or small-size workpieces. Thanks to the two infeed-wheels and the third outfeed one, the workpiece is constantly and evenly fed through the working process, thus remarkably improving the quality of the end products.

### 8 SPEED -"SMART" AND QUICK SET-UP

Swapping the internal gears You obtain the 8 speeds; moreover the speed selector, on the motor unit, allows a quick set-up of the 1st and the 2nd feeding rate and the quick change of the feeding direction back and forth

### ECO-FRIENDLY WHEELS

50-shore wheels made of patented "Feeder Grip" rubber, providing the highest grip, while the "SHS" patent reduces the wear rate by 51 %, and the waste material ( replaceable rubber casings) for a lower impact on the environment



**Improves the safety** : the operator does not have to put his hands close to the tool



**Improves the finish quality**, thanks to the constant and even feed-rate



**Feed-rate can be easily selected** to meet every specific working need



**Easily adjustable** to suit different sizes of work piece



## STEFF 2033 SERVICE

Worldwide after-sale service.  
Real-time, on-line remote assistance through a dedicated augmented reality APP.  
Spare-parts availability for up to 10 years, shipment within 24 hrs


## DATA SHEET

N. of speeds back and forth	8
Fixed speeds	3.2 - 6.3 - 8.3 - 12.5 - 16.7 - 25 - 32 - 63 mt/min
N. of wheels	3
Wheel diameter and thickness	120 x 60 mm
Motor	1 HP / 0,75 KW RPM 1400 /2800
Wheel suspension	20 mm
Distance between wheels	○○○ 142 mm - 124 mm
Distance between first and last wheel	○○○ 266 mm
Overall dimensions and net weight of the feeding unit	424 x 210 x 460 mm
Overall dimensions and net weight of the stand	715 x 680 mm
Package dimensions and gross weight (feeding unit)	680x570x340 mm 50 Kg
Package dimensions and gross weight ( stand)	Packed with the feeding unit



### SAFETY AS A CORE VALUE

A power-feeder improves the safety as it feeds the workpiece close to the tool, while operator's hands are kept at a distance. Its effectiveness depends on specific design and manufacturing criteria. Maggi feeders are the only ones designed and manufactured in Italy and abiding by all EU safety norms.

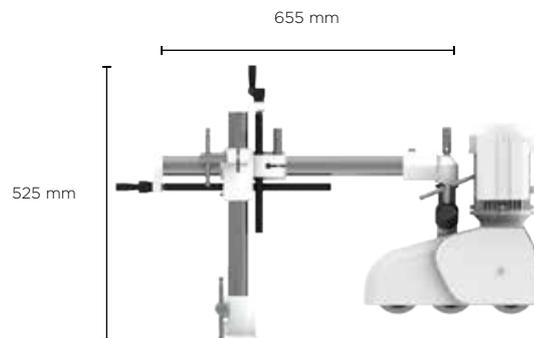

### UNIVERSAL STAND

For easy positioning and adjusting of the feeding unit on the machine tool. It is easy to fix, stable and strong : foot, cross-shaped piece, pipe and joint are made of cast-iron and the two columns are made of rectified steel of considerable thickness.

**MAGGI TECHNOLOGY**  
Via delle Regioni, 299  
50052 Certaldo (Firenze) Italia

**SERVICE**  
+39 0571 635 433  
service@maggi-technology.com

**SALES**  
+39 0571 635 474  
sales@maggi-technology.com

